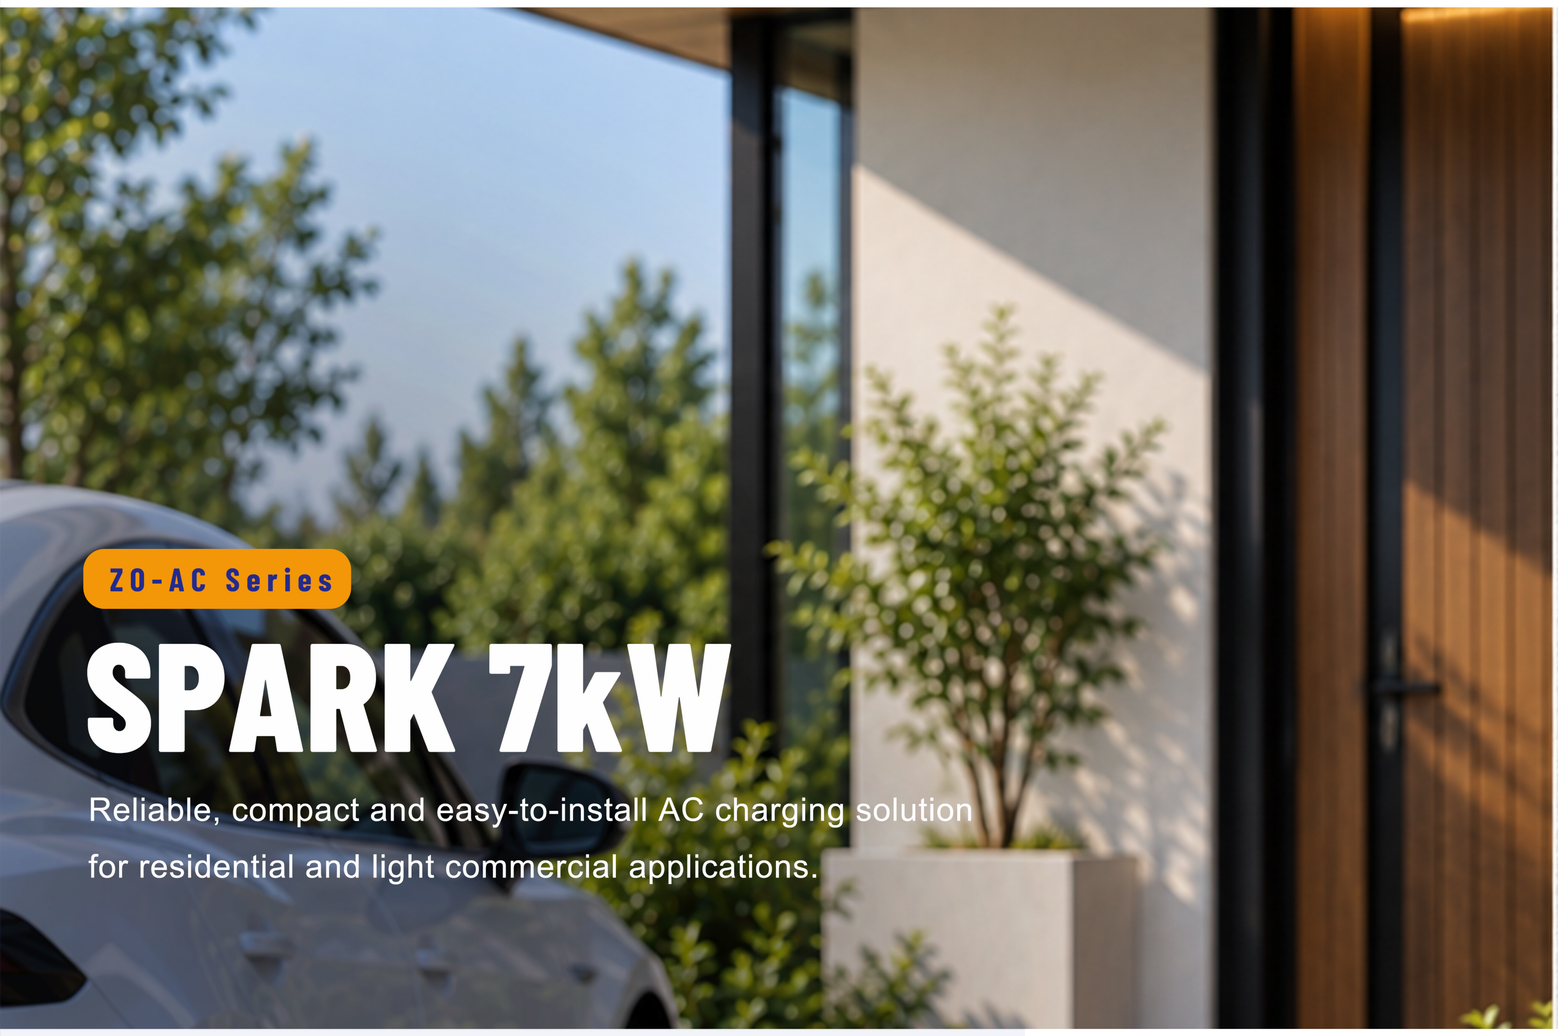

ZO-AC Series

SPARK 7kW

Reliable, compact and easy-to-install AC charging solution for residential and light commercial applications.





KEY FEATURES

- Type 2 / GB/T, single phase
- Compact design-easy carry & install
- Wall-mounted or pedestal-mounted installation
- Top seller, highly stable, and unbeatable value
- IP55 rated for indoor & outdoor applications
- Multiple protections for safe use

PROTECTIONS

- Overvoltage
- Undervoltage
- Overcurrent
- Overheat
- Short-Circuit
- Leakage
- Lightning
- Emergency Stop

CERTIFICATIONS

CE | NOM | PEA | ANATEL | UKCA

GENERAL INFORMATION

Type 2	IP55	Wall / Pedestal
CONNECTOR	PROTECTION RATING	MOUNTED

TECHNICAL SPECIFICATIONS

Input Voltage	Single Phase 165-265V
Rated Current	32A
Operating Frequency	50 / 60 Hz
Operating Altitude	≤3000m
Operating Humidity	5%-95% RH, Non-condensing
Operating Temperature	-40 ℃ to + 55 ℃
Storage Temperature	-40 ℃ to + 85 ℃
IP Rating	IP 55
Mechanical Life	≥10000 plug-in cycles
Functions	RFID for basic version
Protocol	OCPP 1.6J （optional for high version）
Product Size	380mm × 290mm × 225mm
Product Weight	4 kg

Reach out to ZO POWER for a smarter way to charge.

- Custom Branding
- Customized UI
- Cloud Platform
- OCPP1.6 ready
- OTA Update
- 24 / 7 Technical support

EMAIL
info@zo-power.com

WEBSITE
www.zo-power.com